

# GPURE® SMARTEC PLUS Ceiling Mounted Urinal Flushing Kit

# **PLUS6000**

Ceiling Mounted Urinal Flushing Kit with Adjustable Infrared Passive Detection, Solenoid Valve, Air Break & Mains Power Transformer - 5 Star 0.9 lpm

#### **Product Features**



- · Adapted to heavy use locations
- Compact ceiling installation avoids problems with vandalism
- Sensitivity is easily adjustable
- · Flush time is easily adjustable
- Automatic hygiene flush function available (every 6 hours)

## **Technical Information**



Materials Solenoid Valve: Plastic Ceiling Cover: Plastic

Inlet 15mm Female (G 1/2" BSP)

Outlet 40mm male (G 1 1/2" BSP)

Run time 1-20 seconds (Adjustable) Passive

Recommended
Working Pressures
350kPa

Working Temperatures 5°C - 60°C

Warranty 2 years\*

Input 900 mA (Mains Power Only)

Sensitivity Up to 5 metres

### **Product Certifications**







WELS: UM00483



A: Unit 6, 20 - 28 Ricketty St, Mascot, NSW 2020

P: +612 9319 4422

F: +612 8088 7635


E: info@gentecaustralia.com.au



Note: The information provided is only a guide, actual product may differ. The information here should not be relied on without clarification with Gentec. Gentec reserves the right to make design changes at any time without notification.

\*Subject to terms and conditions, available at www.gentecaustralia.com.au/page/terms\_and\_conditions



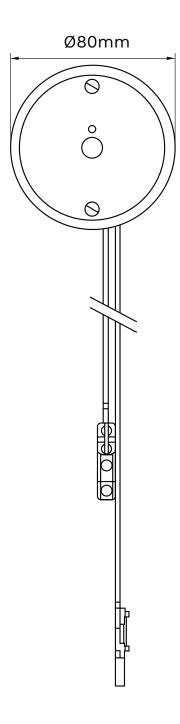

All measurements are in millimetres and should be used as a guide only



- A: Unit 6, 20 28 Ricketty St, Mascot, NSW 2020
- P: +612 9319 4422
- F: +612 8088 7635
- E: info@gentecaustralia.com.au



Note: The information provided is only a guide, actual product may differ. The information here should not be relied on without clarification with Gentec. Gentec reserves the right to make design changes at any time without notification.

\*Subject to terms and conditions, available at www.gentecaustralia.com.au/page/terms\_and\_conditions