


for the SCHELL COMPACT RD electronic sensor urinal valve

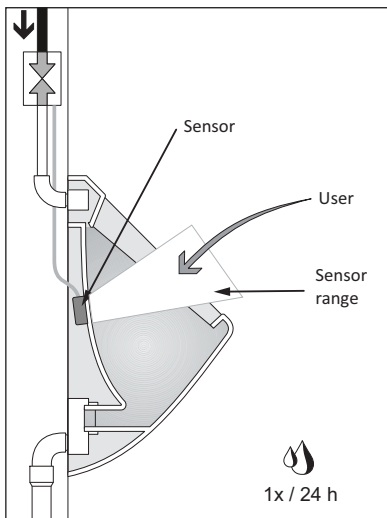

Scope of supply

- Solenoid valve
- Compact rough-in set with air-break
- RD Electronic sensor/control module
- Power supply
- Cables*
- Adhesive
- Screwdriver

* All supplied cables are 5m long.

Operation Description

The Compact RD uses a Radar Detection system to detect the movement of a user.

The system is unaffected by common ambient influences such as light, people passing by and nearby structures.

The system also includes a programmed self sensing stadium mode and a periodic stagnation/hygiene flush.

Flushing volume can be adjusted to deliver 0.6 - 6L of water in a single flush


Technical Data

- Flow pressure: 50 - 500kPa
- Flow rate: 0.3l/sec
- Power supply: 240V 50/60Hz
- Output: 7.5V 1A
- Noise class II
- Protection class: IP64
- Stagnation/hygiene flush: 20sec - 24 hours after last use
- Automatic stadium mode

E-Module/Sensor: Conformity with R & TT 1999/05/EC, EMC 89/336/E


Operation Sequence

1. Use urinal.
2. Approximately 5 seconds dwell time elapses after moving away.
3. Flush operation.
 Flush is adjustable 2-20 seconds (see p4).
 Factory flush setting - 20 seconds.
 Flushing is locked for approximately 8 seconds after each flush.

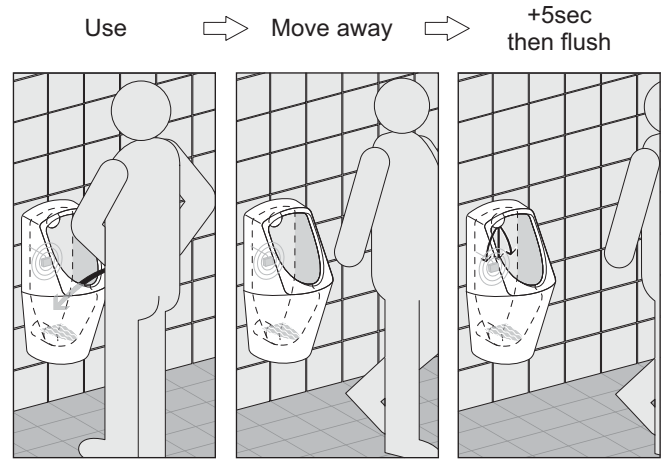


Note:

- Stadium mode will automatically commence when there are >3 uses within 4 minutes.
- Stadium mode operates 1 flush/minute.
- Stadium mode will finish when no use is detected for 5 minutes.
- A 20 sec stagnation/hygiene flush operates every 24 hours of non-use.

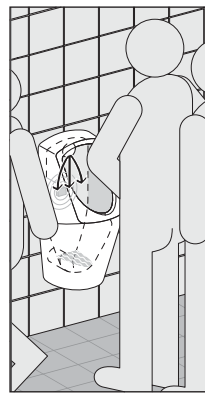

Component list



1. Compact rough-in set with air break
2. Power supply
3. Solenoid valve
4. Sensor/control module
5. Flush pipe (not included)
6. Power connecting cable
7. Solenoid connecting cable
8. Conduit (not included)

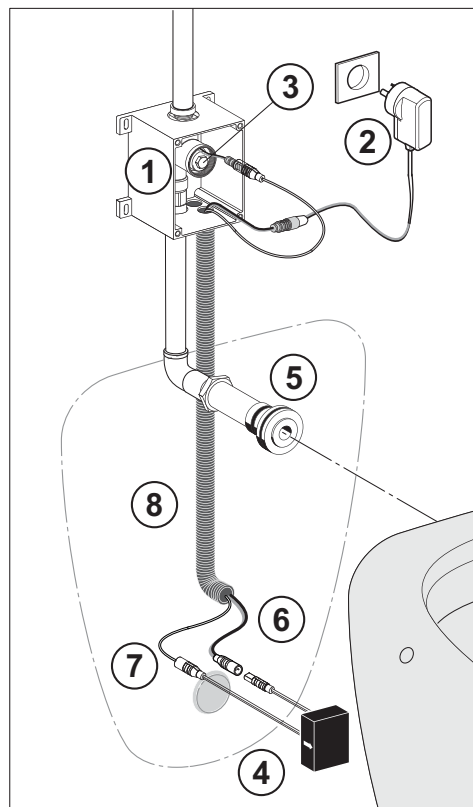

Assembly

1. Complete the water supply connection to the flush valve.

Important: the flush valve must be installed vertically and the lines must be flushed prior to fitting the solenoid valve.

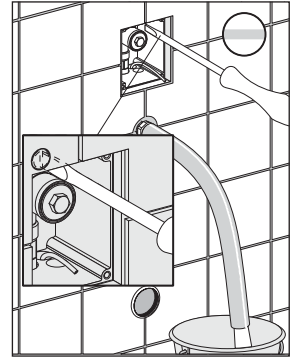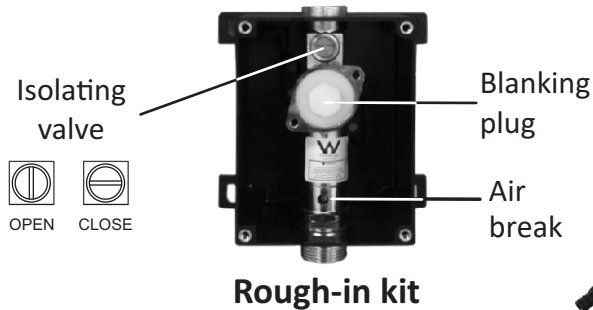

2. Remove the white plastic blanking plug from the solenoid cavity

3. Screw in the solenoid valve - hand tighten only

4. Pull the extension cables through the conduit - note that the conduit must have no kinks in it


5. Connect the extension cables to the sensor, power supply and solenoid

6. Connect the supply transformer to power point. **Important** - ensure that the correct wiring connections are made prior to installing the urinal.

Note: Surge protectors are recommended to avoid power spikes affecting the life of the transformer and control module



Solenoid



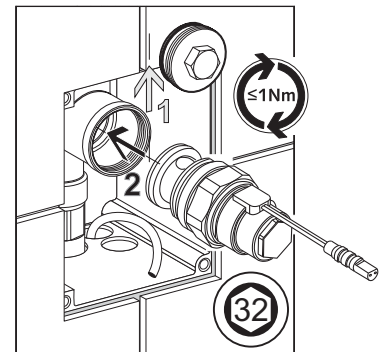


Sensor Installation

1. Locate and clean the fixing location of the sensor on the ceramic piece. Mark the location with a felt tip pen.

2. Cut and apply the strip adhesive **only to the sides of the sensor housing** - there must be **no adhesive between the sensor housing and the urinal wall**

3. Press the sensor module firmly into position and hold in place for approximately 20 seconds

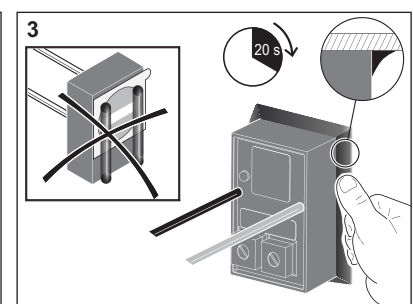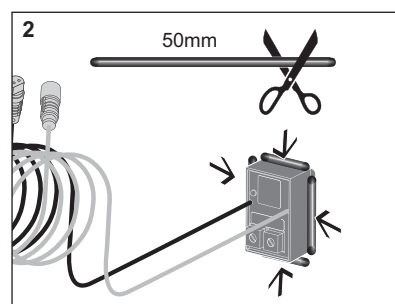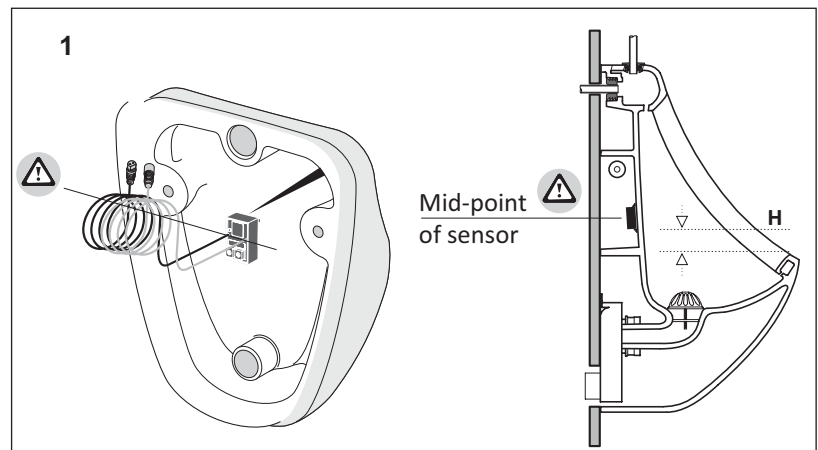


IMPORTANT:

Position of the sensor depends on the urinal selected. The sensor must be placed at the back of the urinal, at a level above the height of the front rim of the urinal (as per 'H' dimension)!

Sensor Adjustment


1. LED indicator light
2. Use the screwdriver supplied to adjust the radar sensitivity (range 0 - 50 centimetres) Set at approximately 40cm.
3. Use the screwdriver supplied to adjust the flush time (2 - 20 seconds)
Note: for a single stall set the timer to ~5 seconds

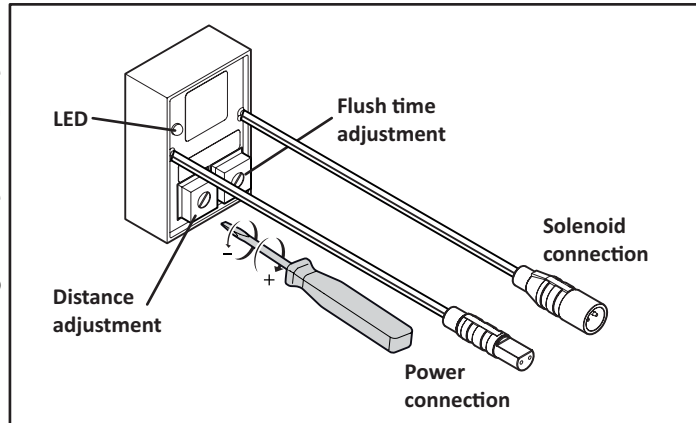

Commissioning

Function Test (Dry)


1. Close the isolating valve
2. Ensure that the power supply is OFF
3. Check that all cables are properly connected
4. Turn the power supply ON
5. Within 60 seconds of power on, move your hand in front of the sensor position and verify that the LED turns on. This confirms correct operation
6. Turn OFF the power supply while mounting the ceramic urinal

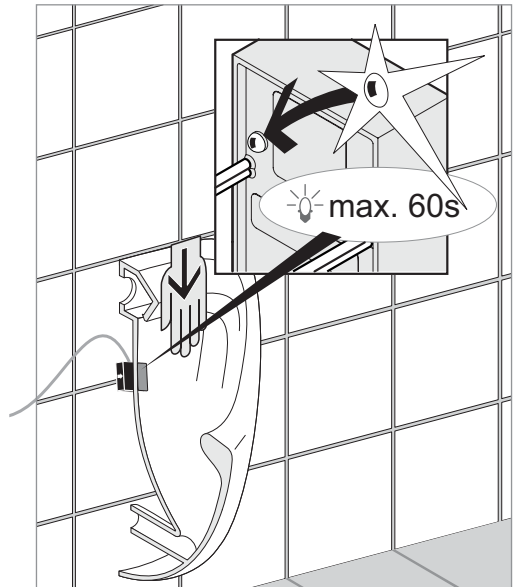

Function Test (Wet)

With the urinal fitted in position, connected and power on, conduct the following test:

1. Turn isolating valve on.
2. Using a suitable container pour approximately 100-150ml into the urinal bowl in the sensor area.
3. Flushing will occur after a time delay of approximately 5 seconds.
4. After approximately 8 seconds (lock period after flush) repeat the test.
5. In the event of a malfunction refer to the error checklist - P. 5

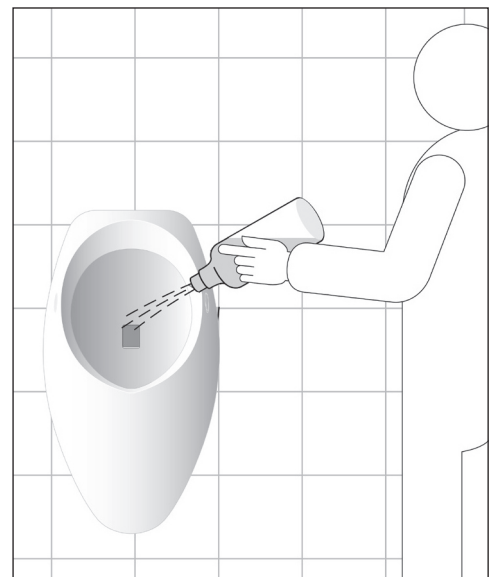


Error Checklist

Fault	Possible cause	Remedy
Not flushing	<p>No water</p> <p>No power supply</p> <p>Insufficient test water quantity</p> <p>Test interval too short</p> <p>Sensor not mounted correctly</p> <p>Sensor sensitivity not correct</p> <p>Water running for too long</p> <p>Sensor module defective</p>	<p>Open isolating valve</p> <p>Check mains connection and plug in connections</p> <p>Pour approx 100-150ml water into urinal</p> <p>Time difference after flushing (water still running) approx 8s.</p> <p>Check position and direction of arrow of sensor</p> <p>Increase sensor sensitivity</p> <p>Install supply set with backflow preventer, if necessary replace solenoid valve</p> <p>Replace</p>
Continuous flow	<p>Flow pressure too low</p> <p>Sensor module placed too low</p> <p>Incorrect application of the adhesive that holds sensor in place</p> <p>Solenoid valve defective</p> <p>Sensor module defective</p>	<p>Open isolating valve (min. 0.5bar)</p> <p>Refer to correct installation in P.3</p> <p>Ensure the adhesive is NOT applied between the sensor and the ceramics, but around the sensor housing. refer to P.3 for correct installation.</p> <p>Replace</p> <p>Replace</p>
Insufficient flushing	<p>Flow pressure too low</p> <p>Flush time too short</p>	<p>Open isolating valve (min. 0.5bar)</p> <p>Adjust the flush time</p>


Typical installation solutions

Inwall installation

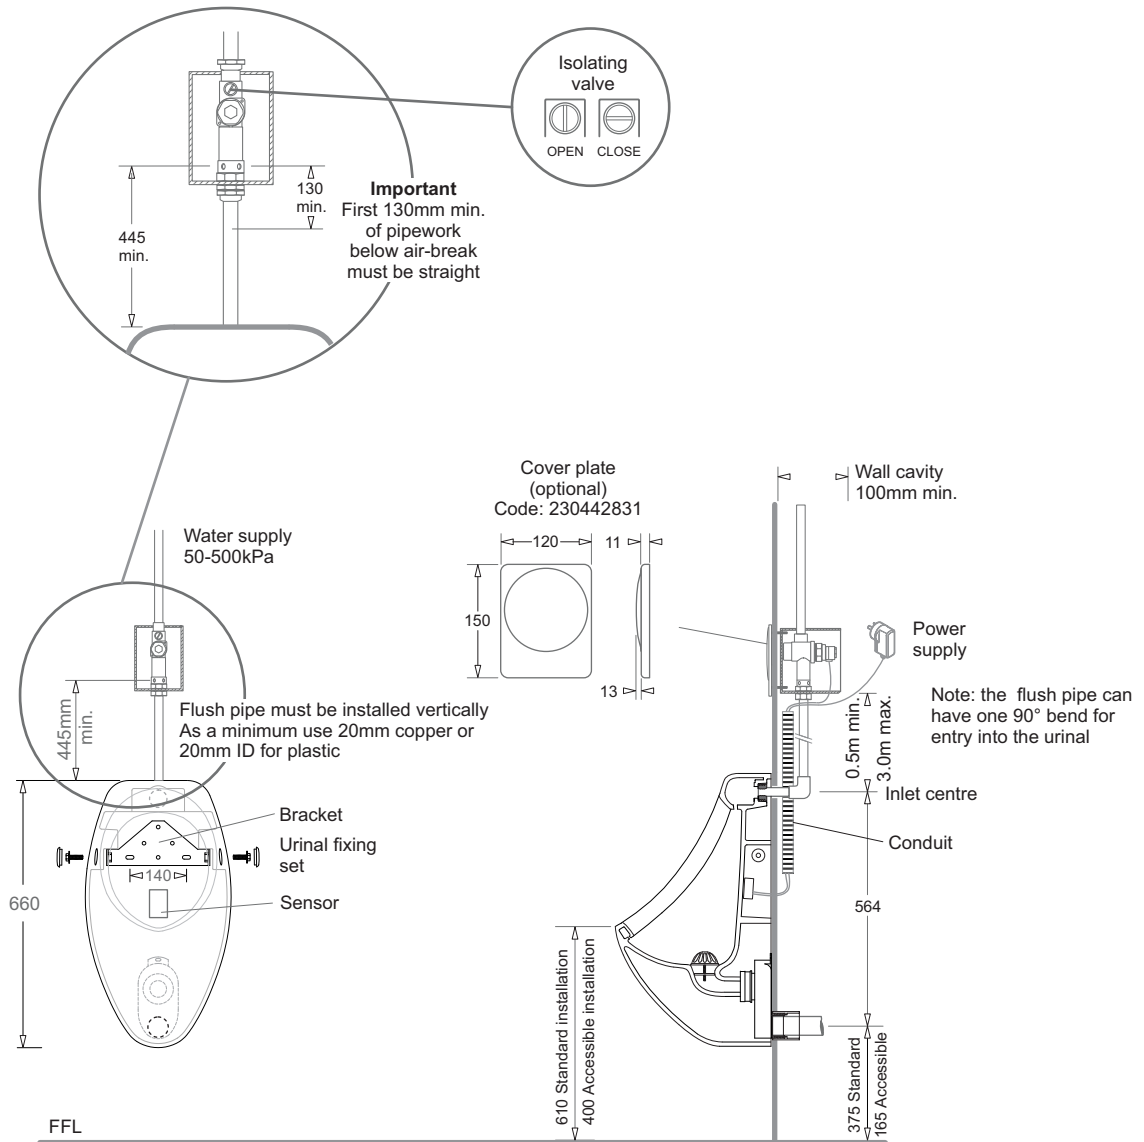


Note: Flush pipe must be vertical until the 90° bend at the urinal entry. There must be no other bends than this.

In-duct installation

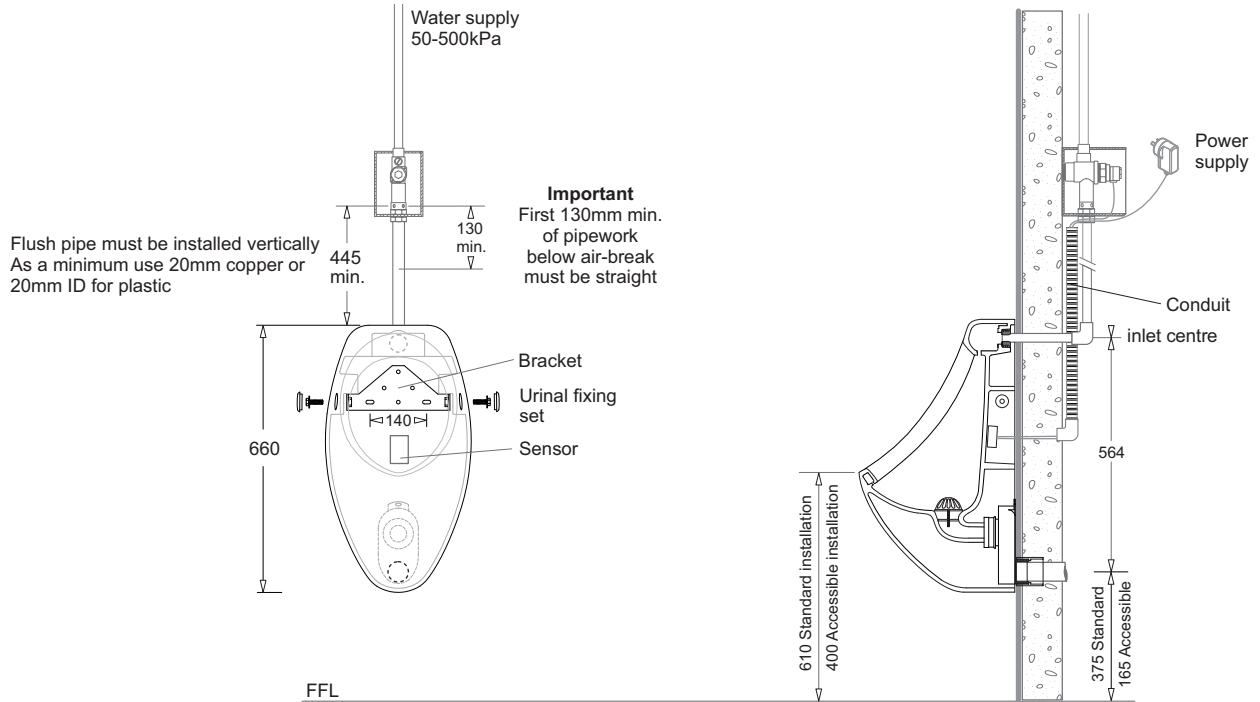

Note: Flush pipe must be vertical until the 90° bend at the urinal entry. There must be no other bends than this.

Ceiling installation

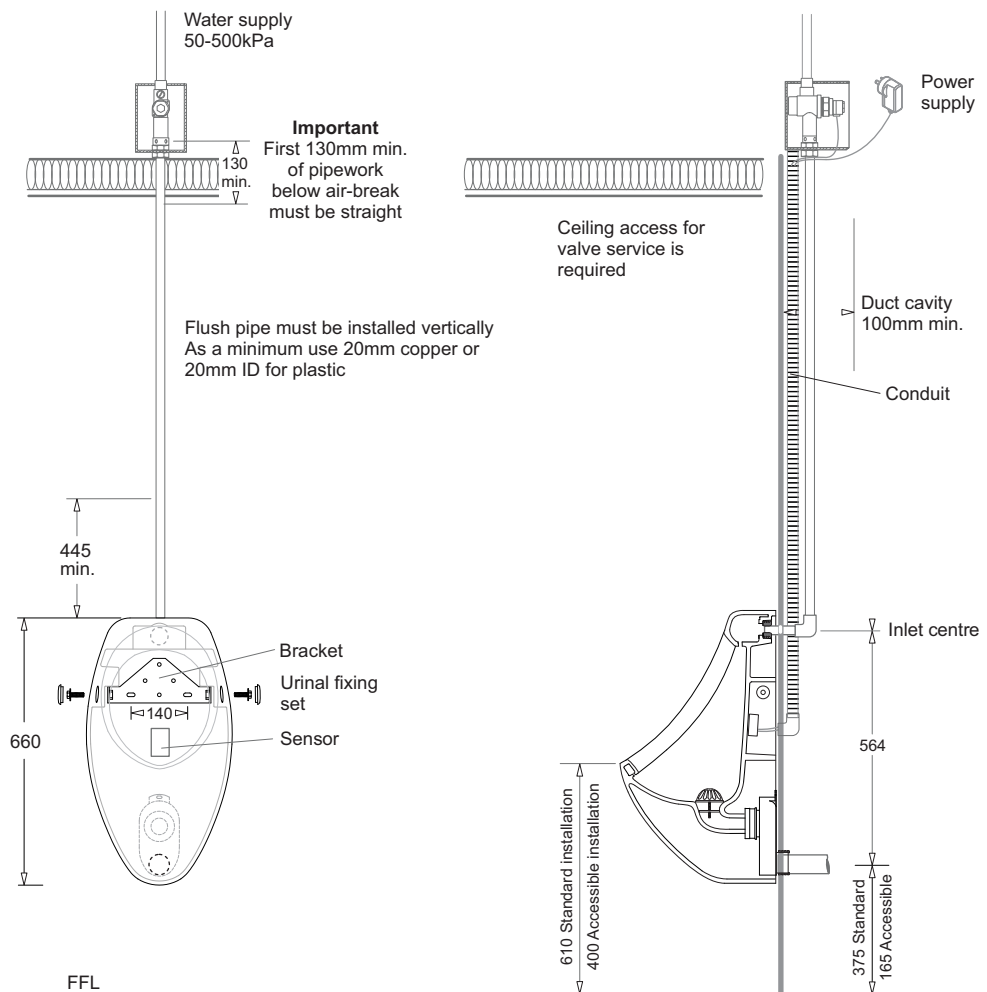

Note: Flush pipe must be vertical until the 90° bend at the urinal entry. There must be no other bends than this.