

Maintenance Instruction Changing D-Valve

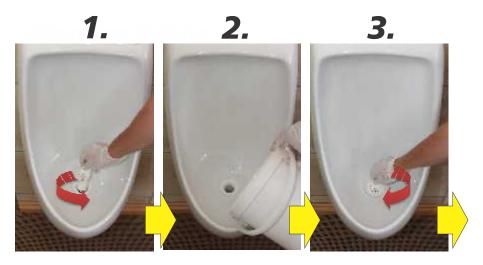

Remove D-Valve with Service Key counter clockwise and dispose

Flush the drain with approximately 10L of water

Install the the new D-Valve clockwise using the Service Key



Spray urinal with Biox cleaner.

Finished!

In order to get the best from your waterless urinal it is important that you follow the maintenance instruction above. The D-Valve needs to be changed on average between 2 and 4 times a year depending on usage.



Sydney - Head Office 1800 URINAL (874625) (02) 9863 0968 info@theurinalshop.com.au